



BGP Flow Spec for DDoS mitigation





Hello

I'm Pavel Odintsov, DDoS mitigation enthusiast, the author of FastNetMon.
<https://fastnetmon.com> and CTO of FastNetMon LTD.

Ways to contact me:


- [linkedin.com/in/podintsov](https://www.linkedin.com/in/podintsov)
- github.com/pavel-odintsov
- twitter.com/odintsov_pavel
- IRC, Libera Chat, [pavel_odintsov](#)
- pavel@fastnetmon.com

Current DDoS Weather

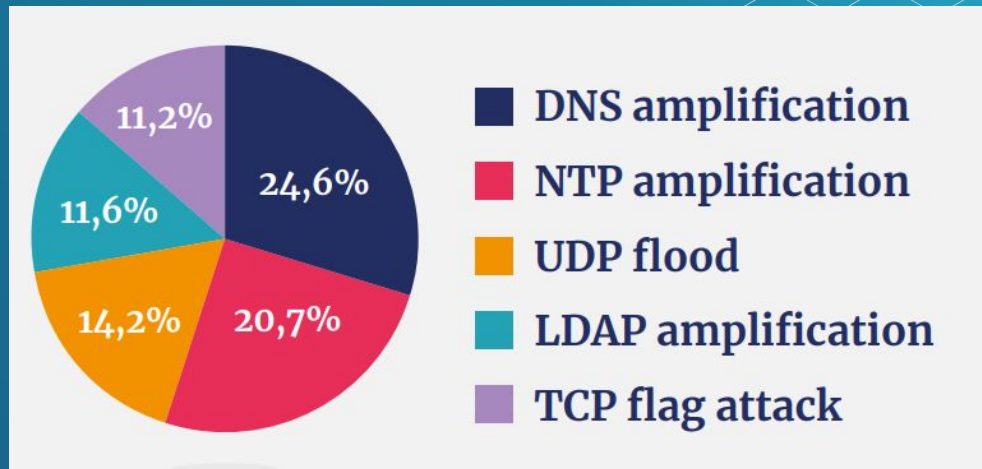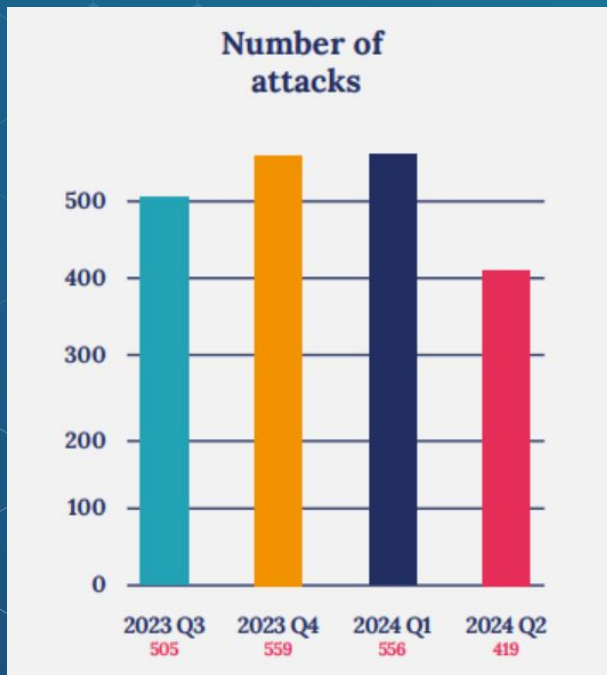

Data provided by The Dutch National Scrubbing Center (NaWas)


BGP Blackhole / RTBH

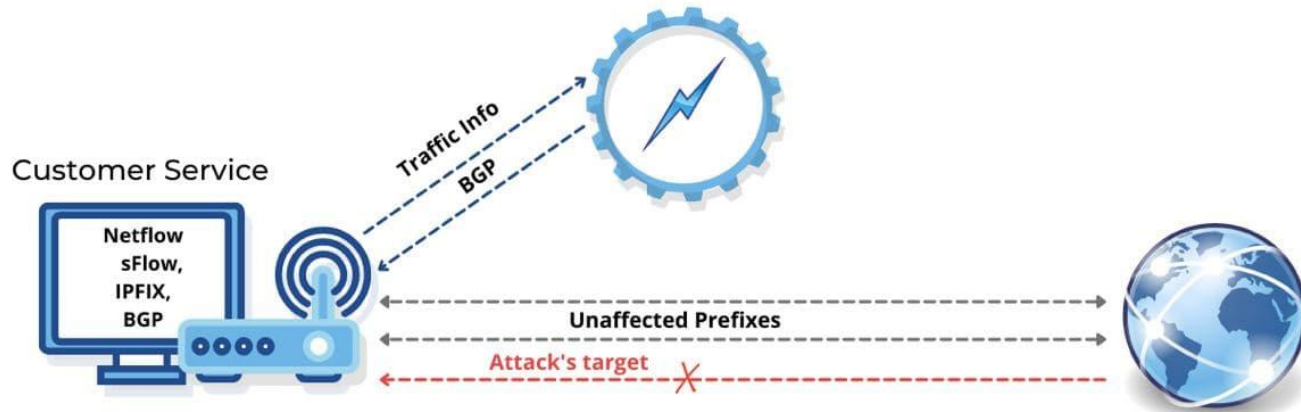

A stylized illustration in light blue outlines on a dark blue background. It features a large planet with a ring, several stars of different sizes, and a small rocket ship with a flame trail.

What is the
problem?

Carpet Bombing Attack

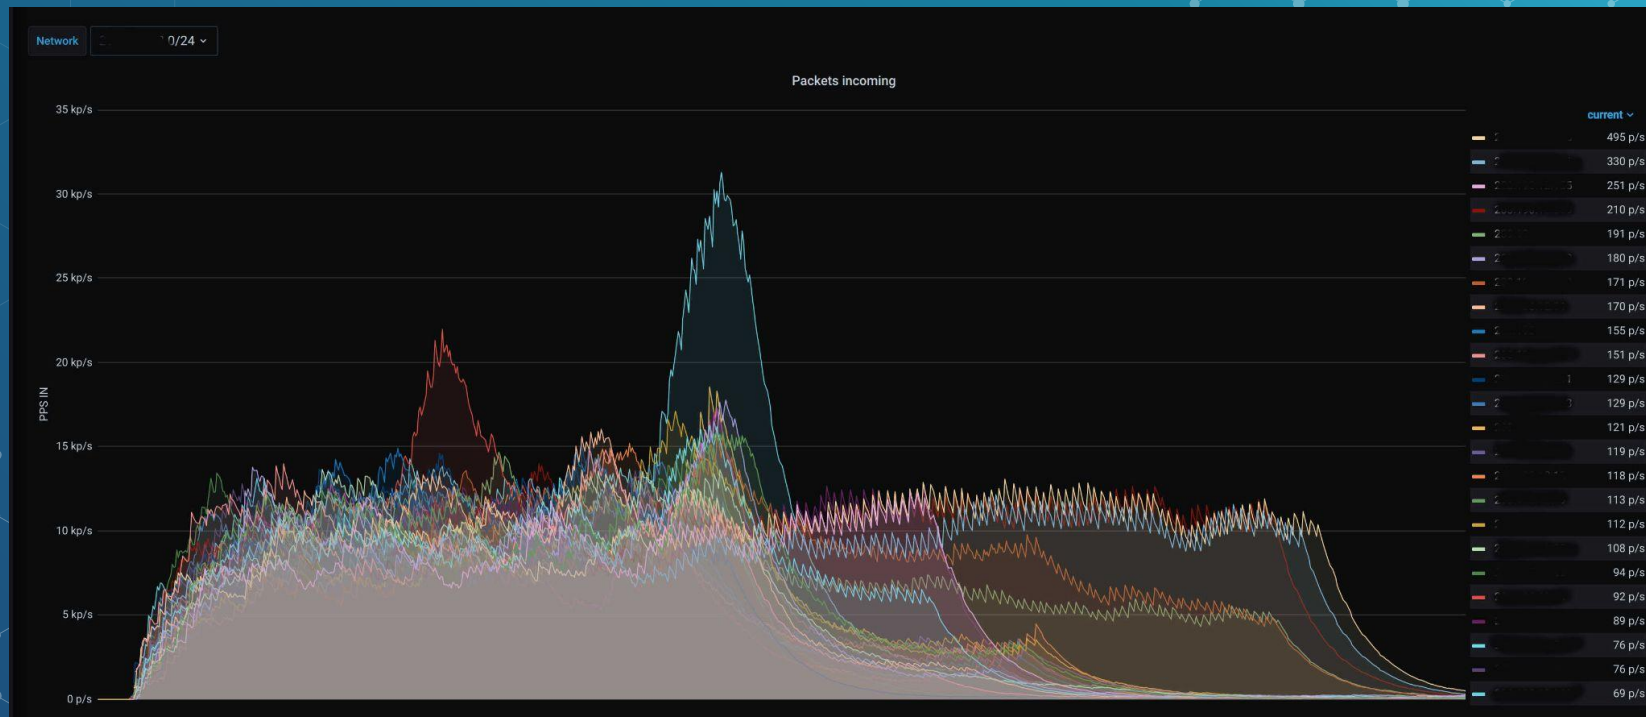

The background of the slide features a repeating pattern of interconnected hexagons, creating a honeycomb-like structure. The hexagons are outlined in a light blue color against a darker blue background. In the top-left corner, there is a small, solid blue hexagon.

What is BGP Flow Spec / RFC5575

- Protocol to configure distributed firewall
- BGP NLRI (Network Layer Reachability Information)
- RFC 5575 standard was published in 2009



BGP Flow Spec filtering capabilities

- Source prefix (IPv4 or IPv6)
- Destination prefix (IPv4 or IPv6)
- IP Protocol number
- List or range of source ports for TCP and UDP
- List or range of destination ports for TCP and UDP
- ICMP code
- TCP flags
- Packet length
- Fragmentation flags (do not fragment, is fragment, first or last fragment)
- DSCP

The background of the slide features a repeating pattern of hexagons. Some hexagons are solid blue, while others are white outlines. The pattern is more dense on the right side and fades out towards the left. A small 3D blue cube is positioned to the left of the title.

BGP Flow Spec filtering actions

- Drop
- Rate limit
- Accept
- Mark (DSCP)
- Redirect to VRF
- Redirect to nexthop (draft)

Workgroup spent 6 years on RFC 5575

Dissemination of Flow Specification Rules

draft-ietf-idr-flow-spec-09

Status IESG evaluation record IESG writeups Email expansions History

Versions 09



The information below is for an old version of the document that is already published as an RFC

Document	Type	RFC Internet-Draft (idr WG)
Authors		Pedro Marques ✉ , Jared Mauch ✉ , Nischal Sheth ✉ , Barry Greene ✉ , Robert Raszuk ✉ , Danny McPherson ✉
Last updated		2020-01-21 (latest revision 2009-05-26)
Replaces		draft-marques-idr-flow-spec
Stream		Internet Engineering Task Force (IETF)
Formats		plain text htmlized pdfized bibtex
Reviews		SECDIR Last Call Review
Stream	WG state	WG Document
Document shepherd		No shepherd assigned
IESG	IESG state	RFC 5575 (Proposed Standard)
	Consensus	Unknown
	Boilerplate	
	Telechat date	
	Responsible AD	Adrian Farrel
	Send notices to	(None)

Support on Juniper, JunOS 12.3, March 2012?

Border Gateway Protocol (BGP)	
BGP flow specification version 7	
See Supported Releases	
Results	
The selected features are supported in following products/applications and releases:	
Product/Application	Supported Release(s)
MX5	Junos OS
	21.4R1 21.3R2 21.3R1 21.2R2 21.2R1 21.1R3 21.1R2 21.1R1 20.4R3 20.4R2 20.4R1 20.3R3 20.3R2 20.3R1 20.2R3 20.2R2 20.2R1
	20.1R3 20.1R2 20.1R1 19.4R3 19.4R2 19.4R1 19.3R3 19.3R2 19.3R1 19.2R3 19.2R2 19.2R1 19.1R3 19.1R2 19.1R1 18.4R3 18.4R2
	18.4R1 18.3R3 18.3R2 18.3R1 18.2R3 18.2R2 18.2R1 18.1R3 18.1R2 18.1R1 17.4R3 17.4R2 17.4R1 17.3R3 17.3R2 17.3R1 15.1R7
	15.1R6 15.1F7 15.1R5 15.1F6 15.1R4 15.1R3 15.1F5 15.1F4 15.1F3 15.1R2 15.1F2 15.1R1 12.3R12 12.3R11 12.3R10 12.3R9 12.3R8
	12.3R7 12.3R6 12.3R5 12.3R4 12.3R3 12.3R2 12.3R1
MX10	Junos OS
	21.4R1 21.3R2 21.3R1 21.2R2 21.2R1 21.1R3 21.1R2 21.1R1 20.4R3 20.4R2 20.4R1 20.3R3 20.3R2 20.3R1 20.2R3 20.2R2 20.2R1
	20.1R3 20.1R2 20.1R1 19.4R3 19.4R2 19.4R1 19.3R3 19.3R2 19.3R1 19.2R3 19.2R2 19.2R1 19.1R3 19.1R2 19.1R1 18.4R3 18.4R2
	18.4R1 18.3R3 18.3R2 18.3R1 18.2R3 18.2R2 18.2R1 18.1R3 18.1R2 18.1R1 17.4R3 17.4R2 17.4R1 17.3R3 17.3R2 17.3R1 15.1R7
	15.1R6 15.1F7 15.1R5 15.1F6 15.1R4 15.1R3 15.1F5 15.1F4 15.1F3 15.1R2 15.1F2 15.1R1 12.3R12 12.3R11 12.3R10 12.3R9 12.3R8
	12.3R7 12.3R6 12.3R5 12.3R4 12.3R3 12.3R2 12.3R1
MX40	Junos OS
	21.4R1 21.3R2 21.3R1 21.2R2 21.2R1 21.1R3 21.1R2 21.1R1 20.4R3 20.4R2 20.4R1 20.3R3 20.3R2 20.3R1 20.2R3 20.2R2 20.2R1
	20.1R3 20.1R2 20.1R1 19.4R3 19.4R2 19.4R1 19.3R3 19.3R2 19.3R1 19.2R3 19.2R2 19.2R1 19.1R3 19.1R2 19.1R1 18.4R3 18.4R2
	18.4R1 18.3R3 18.3R2 18.3R1 18.2R3 18.2R2 18.2R1 18.1R3 18.1R2 18.1R1 17.4R3 17.4R2 17.4R1 17.3R3 17.3R2 17.3R1 15.1R7
	15.1R6 15.1F7 15.1R5 15.1F6 15.1R4 15.1R3 15.1F5 15.1F4 15.1F3 15.1R2 15.1F2 15.1R1 12.3R12 12.3R11 12.3R10 12.3R9 12.3R8
	12.3R7 12.3R6 12.3R5 12.3R4 12.3R3 12.3R2 12.3R1
MX80	Junos OS
	21.4R1 21.3R2 21.3R1 21.2R2 21.2R1 21.1R3 21.1R2 21.1R1 20.4R3 20.4R2 20.4R1 20.3R3 20.3R2 20.3R1 20.2R3 20.2R2 20.2R1
	20.1R3 20.1R2 20.1R1 19.4R3 19.4R2 19.4R1 19.3R3 19.3R2 19.3R1 19.2R3 19.2R2 19.2R1 19.1R3 19.1R2 19.1R1 18.4R3 18.4R2
	18.4R1 18.3R3 18.3R2 18.3R1 18.2R3 18.2R2 18.2R1 18.1R3 18.1R2 18.1R1 17.4R3 17.4R2 17.4R1 17.3R3 17.3R2 17.3R1 15.1R7
	15.1R6 15.1F7 15.1R5 15.1F6 15.1R4 15.1R3 15.1F5 15.1F4 15.1F3 15.1R2 15.1F2 15.1R1 12.3R12 12.3R11 12.3R10 12.3R9 12.3R8
	12.3R7 12.3R6 12.3R5 12.3R4 12.3R3 12.3R2 12.3R1

Support on Juniper, JunOS 7.3, August 2005?

Router Vendors:

- Alcatel-Lucent SR OS 9.0R1
- Juniper JUNOS 7.3
- Cisco 5.2.0 for ASR and CRS [6]

Copyright © 2014 Juniper Networks, Inc.

Support on Juniper, JunOS 7.2, May 2005!

Flow Spec Status

IETF draft available at:

– <http://www.tcb.net/draft-marques-idr-flow-spec-03.txt>

- Implemented as of JunOS 7.2 (but not documented)
- At least three tier1/2 providers in process of production deployment
- Several security vendors announced integration
- Cisco complimentary TIDP proposal

8



<https://archive.nanog.org/meetings/nanog38/presentations/labovitz-bgp-flowspec.pdf>

Support on Nokia, March 2011



7750 SR OS Services Guide

Software Version: 7750 SR OS 9.0 r1
March 2011
Document Part Number: 93-0076-08-01



```
Entry      : fSpec-1-32767 - inserted by BGP FlowSpec
Description : (Not Specified)
Log Id     : n/a
Src. IP    : 0.0.0.0/0
Dest. IP   : 0.0.0.0/0
Protocol   : 6
ICMP Type  : Undefined
Fragment   : Off
Sampling   : Off
IP-Option  : 0/0
TCP-syn    : Off
Match action : Drop
Ing. Matches : 0 pkts
Egr. Matches : 0 pkts

Src. Port  : None
Dest. Port : None
Dscp       : Undefined
ICMP Code  : Undefined
Option-present : Off
Int. Sampling : On
Multiple Option: Off
TCP-ack    : Off

Entry      : fSpec-1-49151 - inserted by BGP FlowSpec
Description : (Not Specified)
Log Id     : n/a
Src. IP    : 0.0.0.0/0
Dest. IP   : 0.0.0.0/0
Protocol   : 17
ICMP Type  : Undefined
Fragment   : Off
Sampling   : Off
IP-Option  : 0/0
TCP-syn    : Off
Match action : Drop
Ing. Matches : 0 pkts
Egr. Matches : 0 pkts

Src. Port  : None
Dest. Port : None
Dscp       : Undefined
ICMP Code  : Undefined
Option-present : Off
Int. Sampling : On
Multiple Option: Off
TCP-ack    : Off
```

=====

```
*A:Dut-C>config>filter#
```

Support on Cisco, 2014

Cisco Routers BGP FS Implementation



Platform Hardware	Support in Data Plane
ASR 9k – Typhoon LC (MOD80/160, 24-36x10G, 1-2x100G)	XR 5.2.0
ASR 9k – SIP700	XR 5.2.2
ASR 9001(-S)	XR 5.2.2
ASR 9k – Tomahawk (MOD200/400, 4-8-12x100G)	XR 5.3.0
CRS-3 (Taiko) LC (1x100G, 14-20x10G, Flex)	XR 5.2.0
CRS-X (Topaz) LC (4x100G, 40x10G, Flex)	XR 5.3.2
NCS 6000	XR 5.2.4 / 6.2.2 / roadmap*
XRv 9000	5.4.0 CP only / DP later
NCS 5000 / NCS 5500	In the roadmap
ASR 1000	IOS XE 3.15
CSR 1000v	IOS XE 3.15
NCS 5500 (Jericho+ w/ eTCAM)	XR 6.5.1

Note: IOS XE introduced the support of BGP FS in 3.15 (but not as a controller role)

Support on GoBGP, 2015

IPv4/IPv6 FlowSpec

```
# Add a route
$ gobgp global rib -a {ipv4-flowspec|ipv6-flowspec} add match <MATCH> then <THEN>

<MATCH> : { destination <PREFIX> [<OFFSET>] |
            source <PREFIX> [<OFFSET>] |
            protocol <PROTOCOLS>... |
            fragment <FRAGMENTS>... |
            tcp-flags <TCP_FLAGS>... |
            port <ITEM>... |
            destination-port <ITEM>... |
            source-port <ITEM>... |
            icmp-type <ITEM>... |
            icmp-code <ITEM>... |
            packet-length <ITEM>... |
            dscp <ITEM>... |
            label <ITEM>... }...

<PROTOCOLS> : [&] [<|<=>|>=|!=|] <PROTOCOL>
<PROTOCOL> : egp, gre, icmp, igmp, igp, ipip, ospf, pim, rsvp, sctp, tcp, udp, unknown, <DEC_NUM>
<FRAGMENTS> : [&] [=|!|!] <FRAGMENT>
<FRAGMENT> : dont-fragment, is-fragment, first-fragment, last-fragment, not-a-fragment
<TCP_FLAGS> : [&] [=|!|!] <TCP_FLAG>
<TCP_FLAG> : F, S, R, P, A, U, E, C
<ITEM> : [&] [<|<=>|>=|!=|] <DEC_NUM>
<THEN> : { accept |
           discard |
           rate-limit <RATE> [as <AS>] |
           redirect <RT> |
           mark <DEC_NUM> |
           action { sample | terminal | sample-terminal } }...

<RT> : xxx:yyy, xxx.xxx.xxx.xxx:yyy, xxxx::xxxx:yyy, xxx.xxx:yyy

# Show routes
$ gobgp global rib -a {ipv4-flowspec|ipv6-flowspec}

# Delete route
$ gobgp global rib -a {ipv4-flowspec|ipv6-flowspec} del match <MATCH_EXPR>
```

Support on Bird 2, 2017

IPv4 Flowspec

dst inet4

Set a matching destination prefix (e.g. *dst 192.168.0.0/16*). Only this option is mandatory in IPv4 Flowspec.

src inet4

Set a matching source prefix (e.g. *src 10.0.0.0/8*).

proto numbers-match

Set a matching IP protocol numbers (e.g. *proto 6*).

port numbers-match

Set a matching source or destination TCP/UDP port numbers (e.g. *port 1..1023,1194,3306*).

dport numbers-match

Set a mating destination port numbers (e.g. *dport 49151*).

sport numbers-match

Set a matching source port numbers (e.g. *sport = 0*).

icmp type numbers-match

Set a matching type field number of an ICMP packet (e.g. *icmp type 3*)

icmp code numbers-match

Set a matching code field number of an ICMP packet (e.g. *icmp code 1*)

tcp flags bitmask-match

Set a matching bitmask for TCP header flags (aka control bits) (e.g. *tcp flags 0x03/0x0f*). The maximum length of mask is 12 bits (0xfff).

length numbers-match

Set a matching packet length (e.g. *length > 1500*)

dscp numbers-match

Set a matching DiffServ Code Point number (e.g. *dscp 8..15*).

fragment fragmentation-type

Set a matching type of packet fragmentation. Allowed fragmentation types are *dont_fragment*, *is_fragment*, *first_fragment*, *last_fragment* (e.g. *fragment is_fragment && !dont_fragment*).

Support on Extreme, December 2018

Overview

The focus of SLX-OS 18r.2.00 release is enhancing the Border Routing solution for SLX 9850, SLX 9540 as well as support for a new platform, the fixed form factor SLX 9640, for customers requiring larger route scale for border routing with Internet peering.

The following key software capabilities are added in this release:

- High IPv4, IPv6 route scale support on SLX 9640 to enable multiple full Internet peering tables on the same box using multiple VRFs
- Fast convergence at internet peering scale on bootup and peer, nexthop failures with BGP Prefix Independent Convergence(PIC).
- BGP Flowspec support for DDOS protection. This feature as described in RFC 5575 enables dissemination of filtering rules with standard BGP protocol to the border router (or from border router) so specific ACL filters can be applied to take various possible actions on DDOS attack traffic flows.
- BGP large community support per RFC 8092 to support 4-byte ASN in BGP communities attribute for policy handling.
- vSLX support for ESXi Hypervisor with vSLX install software 2.1.0

Support on Arista, March 2020

BGP Flowspec

The **EOS Release 4.21.3F** introduces support for BGP Flowspec, as defined in **RFC5575** and **RFC7674**. The typical use case is to filter or redirect DDoS traffic on edge routers.

BGP Flowspec rules are disseminated using a new BGP address family. The rules include both matching criteria used to match traffic, and actions to perform on the matching traffic. The rules are programmed into TCAM resources and applied on the ingress ports for which flowspec is enabled.

Support for BGP flowspec + Release Updates

Written by Jason Shamberger | Posted on March 11, 2020 | Updated on February 22, 2021 | 2209 Views

EOS 4.21.3F introduces support for BGP Flowspec, as defined in RFC5575 and RFC7674. The typical use case is to filter

4.22.1 # 4.23.2F # 4.23.1 # Flowspec # 4.24.0 # 4.23.2 # 4.22.0

[Read More >](#)

The background of the slide features a repeating pattern of hexagons. Some hexagons are solid blue, while others are white outlines. The pattern is more dense on the right side and fades towards the left.

BGP Flow Spec challenges

- Limited number of BGP Flow Spec rules
- Lack of standard approach to retrieve packet and byte counters per rule
- Lack of proper rule validation
- Different hardware limitations
- Lack of interface to manage rules efficiently
- Weak integration with Netflow and IPFIX
- Lack of solid support for draft-ietf-idr-flowspec-redirect-ip-00

BGP Flow Spec limitations: Juniper MX

- One of the most mature implementations
- Issues with traffic telemetry reporting for discarded traffic in Netflow./IPFIX:
<https://pavel.network/quirks-of-juniper-netflow-and-ipfix-implementations/>

<https://apps.juniper.net/feature-explorer/feature-info.html?fKey=7679&fn=Enhancements+to+inline+flow+monitoring>



BGP Flow Spec limitations: Cisco ASR 9000

- A maximum of five multi-value range can be specified in a flowspec rule
- You cannot configure the IPv6 first-fragment match and last-fragment match simultaneously on the Cisco ASR 9000 series routers as they are mutually exclusive.

<https://www.cisco.com/c/en/us/td/docs/routers/asr9000/software/24xx/routing/configuration/guide/b-routing-cg-asr9000-24xx/implementing-bgp-flowspec.html>

BGP Flow Spec limitations: Huawei

- Huawei's implementation of fragmentation flags is not RFC 5575 compliant by default. It requires setting flag: flowspec ipv4-fragment-rule switch
- Issues with using sFlow for monitoring activity of BGP Flow Spec:
<https://pavel.network/sflow-on-huawei-story-of-scarcity-and-redundancy/>

https://support.huawei.com/hedex/hdx.do?docid=EDOC1100331624&id=EN-US_CLI_REF_0000001711648022

BGP Flow Spec limitations: Arista

- For TCP flags, the ECE, CWR, and NS flags are not supported.
- For fragment flags, only the Is a fragment (IsF) bit is supported only for IPv4 packets. Combining source and destination ports and the Fragment flags in the same rule is not supported

BGP Flow Spec limitations: Extreme

- Only the IsF bit is supported for BGP flowspec NLRI sub-component type 12 (Fragment). DF, FF, and LF bit functionality is not supported.
- Two-byte TCP flags are not supported.
- When a rate-limiting action is set under a BGP flowspec rule, the operational rate value may differ from the rate value specified in the flowspec rule because operational values are selected in multiples of 22 kbits per second.
- IPv4 BGP flowspec rules are applied only to IPv4 data traffic. They are not applied to IPv6 data traffic.
- The following TCP flags are not supported: Explicit Congestion Notification Echo (ECE) and Congestion Window Reduced (CWR)

<https://documentation.extremenetworks.com/slxos/sw/20xx/20.3.1/l3config/GUID-072B8895-C424-43AE-917E-9351225C91E2.shtml>

BGP Flow Spec and IPFIX, Netflow on Cisco

This Information Element describes the forwarding status of the flow and any attached reasons.

The layout of the encoding is as follows:

```
MSB - 0 1 2 3 4 5 6 7 - LSB
+---+---+---+---+---+---+---+
| Status| Reason code or flags |
+---+---+---+---+---+---+---+
```

See the Forwarding Status sub-registries at

[\[https://www.iana.org/assignments/ipfix/ipfix.xhtml#forwarding-status\]](https://www.iana.org/assignments/ipfix/ipfix.xhtml#forwarding-status).

Examples:

```
value : 0x40 = 64
binary: 01000000
decode: 01      -> Forward
        000000  -> No further information
```

```
value : 0x89 = 137
binary: 10001001
decode: 10      -> Drop
        001001  -> Bad TTL
```

Forwarding Status (Value 89)

Registration Procedure(s)

Expert Review

Expert(s)

IE Doctors

Reference

[\[RFC7270\]](#)

Available Formats



CSV

Value	Description	Reference
00b	Unknown	[RFC7270]
01b	Forwarded	[RFC7270]
10b	Dropped	[RFC7270]
11b	Consumed	[RFC7270]

Status 00b: Unknown



FastNetMon: our community

- Site: <https://fastnetmon.com>
- GitHub: <https://github.com/pavel-odintsov/fastnetmon>
- Slack: <https://slack.fastnetmon.com/>
- Telegram: <https://t.me/fastnetmon>
- IRC: #fastnetmon at Libra Chat
- Discord: <https://discord.fastnetmon.com/>
- LinkedIn: <https://www.linkedin.com/company/fastnetmon/>
- Facebook: <https://www.facebook.com/fastnetmon/>
- Twitter: <https://twitter.com/fastnetmon>

THANKS!

ANY QUESTIONS?

You can find me at:

- ◇ @odintsov_pavel
- ◇ pavel@fastnetmon.com
- ◇ linkedin.com/in/podintsov

